



FEATURES & SPECIFICATIONS

- Rated Line Pull:9500LB(4309kg) single-line
- Motor:5.2hp/3.9kw 12V, Series Wound motor
- Gear Train: 3-stage planetary
- Gear Reduction Ratio:265:1
- Clutch:Up and down 90°
- Cable:φ9.5mm×27m
- Drum Size:φ64mm×224mm
- Overall Dimensions:(L×W×H)20.7"×6.4"×8.1"
(527mm×163mm×205mm)
- Gross Weight(cable winch):82.7 lbs(37.5kg)
- Gross Weight(ropc winch):60.6 lbs(27.5kg)
- Duty Cycle:Intermittently
- Fairlead:4-way roller fairlead or aluminium fairlead
- Package:1pc/box, 600×245×370mm
- Mounting Bolt Pattern:10"×4.5"(254×114.3mm)
- Remote Control:Included


LINE Speed & Amp Draw-First Layer

Line Pull	Lbs	NO	2000	4000	6000	8000	9500
	Kgs	LOAD	907	1814	2721	3630	4309
Line speed	Ft/min	30.2	20.7	18.0	13.8	10.2	7.9
	M/min	9.2	6.3	5.5	4.2	3.1	2.4
Motor Current	amps	75	95	195	240	291	325

LINE PULL AND Cable Capacity

Layer of cable		1	2	3	4
Rated line	Lbs	9500	8432	7640	7086
Pull per layer	Kgs	4309	3825	3465	3214
Cumulative	Ft	16	39	69	89
Cable capacity	m	5	12	21	27

Mounting Bolt Pattern

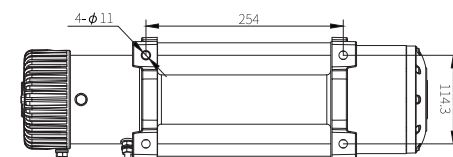

Dimensions

